

## Metal face sensors • Switching point

### Series AGVU

#### M30

One piece stainless steel housing

DC 18...30 V


PNP output

Teach-in programming




### Design Teach-in • M30x1.5

#### Dimensions





Sensing range	[mm]	150...1500
Output		
ID-No.		P72033
Type		AGVU 1500 GSP
Supply voltage	[V]	18...30 DC
Current consumption	[mA]	< 40
Switching current	[mA]	500
Repeatability	[%]	±0.2
Switching frequency	[Hz]	7
Ambient temperature	[°C]	-15...+70
Protection	[EN 60529]	IP 68 + IP 69K
Housing material		AISI 316 Ti
Connection		M12 connector

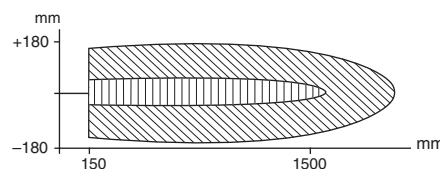

mögliche Erfassung eines großen Objektes  
Possible detection of a large target

Sichere Erfassung eines 100x100 mm Objektes  
Safe detection of a 100x100 mm target



### Accessories connecting cable type SLG 5-2 (Z01150)